


ISADDLE 2 RANGESADDLE STITCHER

PRECISE INTELLIGENCE

PC Controller A4 Landscape booklets Fully automatic setup

Brochures, Catalogues, Car/boat and luxury sales brochures (A4 landscape), Instruction manuals- mobile phones/ games, cameras Educational course work – Schools and universities, CD and CD Rom books, Tourist industry - Travel brochures and guides

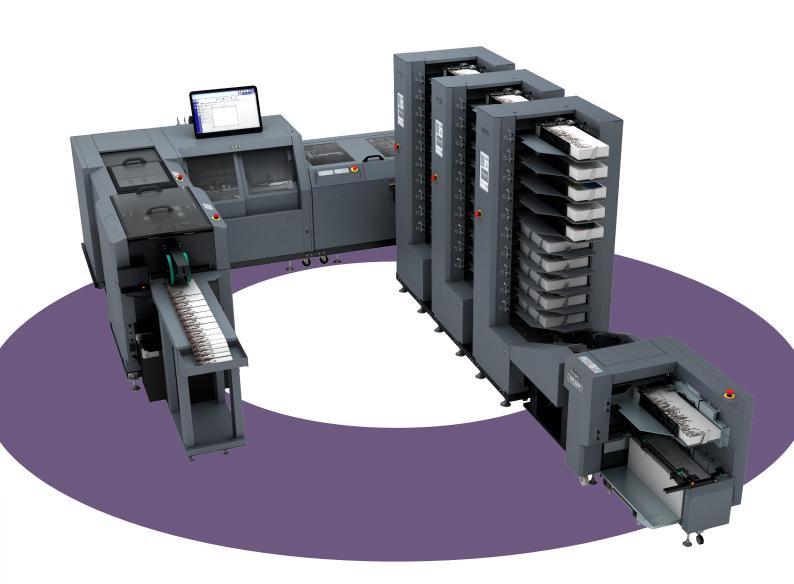

Duplo's iSaddle 2 Family is the only relevant Saddle stitching option in today's market. The iSaddle 2 family offers a wealth of features that allows commercial and digital printers to grow and improve probability of their business. The iSaddle 2 Family brings the best of both worlds, the flatter publications similar to the old generation saddle stitchers and automation like the modern bookletmakers. The iSaddle 2 is a future proof investment because of its new revolutionary saddle stitching technology and A4 landscape capabilities.

Ergonomically designed

The iSaddle 2 is the most compact saddle stitcher available in the market today. The "U shaped" ergonomic configuration and visible paper path, allows the operator to be in control of the complete production process. The whole system can be managed by a single operator.

Automated Precision



The iSaddle 2 is equipped with the latest technology in saddle stitching allowing the automatic set-up of all book parameters to be accurately and precisely registered in now an even faster make-ready time of under 60 seconds. The entire system is managed from the user friendly touch screen PC controller and the operator can create and save an unlimited number of jobs with ease for future instant recall. The job changeover is done without the use of any tools, any extra parts and without operator's intervention.



Productivity


The iSaddle 2 has been engineered to provide the latest technology to allow for the built-in features to maximise output. It can finish up to 5,000 books per hour without operator intervention or any wastage. Adding the optional DKT-200, 3 knife trimmer, increases this up to 9,000 books per hour. The DSC-10/60i has a large bin capacity of 65mm and up to 4 towers can be connected allowing the feeding of multiple subsets or complete sets in various configurations. Intelligent Multi-Bin Feeding software allows the feeding of either pre-collated or collated sections in order to offer a fully flexible and highly productive system.



Superior Feeding

The high speed and intelligent DSC-10/60i suction towers deliver superior performance whilst maintaining complete accuracy. Each tower of 10 bins comes with A.M.S.+ (Air Management System Plus) as standard. Controlled from the PC Controller, this unique feeding system manages the high power fans that create air flow and vacuum independently for each bin, enabling reliable feeding regardless of paper weight or size.



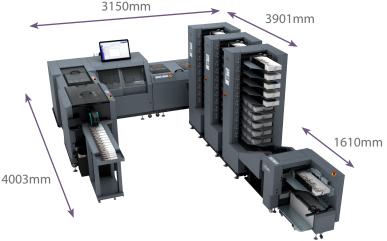

iSaddle 2 paper path



Intelligent Feed system

The DSC-10/60i includes I.M.B.F. (Intelligent Multi Bin Feeding) which allows the operator to select each bin individually, as a block, a tower or link multiple independent bins together to best suit each application. Each tower is completely independent and can be optimised to feed single or multiple sheets from each bin, a huge benefit when producing variable data publications. Bi-directional feeding is now also available as an option.



Scoring and Folding Unit

The scoring wheels on the iSaddle 2 are automatically positioned to create the correct height according to the number of pages programmed in a set. Then the set is transferred to the plough fold unit. The folding wheels are automatically positioned to provide flatter books from 2-120 pages. Additionally, the booklet squareness and skewing can be easily and rapidly adjusted to insure accuracy.



Saddle Stitching

The iSaddle 2 offers the printer a choice of 2, 3 or 4 heavy duty Hohner wire stitching heads in both flat and loop stitch configurations. Precise control of the book is maintained along the spine using motor driven stops and twin drive belts.



3 Knife Trimming

The iSaddle 2 when connected with the optional DKT-200 trimmer provides a completely automatic 3 knife trimming operation. With the optional gutter knife, the printer can finish 2-up printed books at the speed of 9000 per hour. New features include an optional 4mm and 8mm gutter knife option.



Modularity

The iSaddle 2 is a highly versatile and modular saddle system that can be reconfigured and expanded as needs and demands change.

Modularity



iSaddle 2 Duetto System



iSaddle 2 Digital System



iSaddle 2 System



Specifications

iSaddle 2

isadare z				
Max Booklet 1-up Production Speed	5,000 A5-booklets/hr (1 subset) up to 10 sheets Booklet production can vary depending upon the number of pages and subsets	Folding Capacity		2-10 Sheets
		Max Scoring Thickness		1.0 mm
Max Booklet 2-up Production Speed	Up to 9,000 booklets/hr (when connected with DKT-200 Trimmer)	Fine Adjustment		Front 0.1 mm
		Max Stitching Capacity		3 mm (30 Sheets of 80 gsm)
Max Booklet Thickness	6 mm (30 sheets of 80 gsm, 120 pages booklet)	Min/Max Stitching Head Distance (1-up)		60 - 306 mm
Flat Sheet Size	Max 356 mm (W) x 508 mm (L) Max 230 mm (W) x 610 mm (L) Min 120 mm (W) x 210 mm (L)	Stitching Head Distance	2	60 mm (55 mm in fine adjustment mode)
Max Flat Sheet Size over 500 mm in length		Stitching Heads		Standard Fitting: 2x Hohner 43/6S Optional: Up to 4 Heads
Finished Untrimmed Booklet size	Max 356 mm (W) x 254 mm (L) Min 120 mm (W) x 105 mm (L)	Control Panel		PC Control
Finished Booklet Size 1-up Production	Max 350 mm (W) x 250 mm (L)	Job Memories		Infinite from PC Controller
Max Booklet size over 500 mm in length	Min 120 mm (W) x 75 mm (L) Max 210 mm (W) x 305 mm (L)	Folding Rollers		Automatic Mechanism
Finished Booklet Size 2-up Production	Max 174 mm (W) x 254 mm (L)	Scoring Wheels (Double	<u>e</u>)	Springloaded with Manual Height Adjustment
1 stitch in each booklet	Min 90 mm (W) x 75 mm (L)	Error Detect Sensors		Stitching Wire (on the Saddle); Paper Feed; Paper Jam, Safety Guards
Paper Weight Fine quality paper Cover:	from 64 gsm to 157 gsm from 64 gsm to 300 gsm from 81.4 gsm or more from 84.9 gsm to 157 gsm from 84.9 gsm to 300 gsm from 104.7 gsm or more	Power Supply		200 - 240V 50/60Hz 950 W
Flat Sheet Size over 500 mm in Length Art/Coated paper: Cover: Flat Sheet Size over 500 mm in Length		Dimensions - Net weights:	DBMS-F Folder DBMS-S Stitcher DBMS-T Trimmer DKT-200 & DKT-LS	1411mm(W) x 920mm(D) x 898mm(H) - 343kg 1845mm(W) x 935mm(D) x 1162mm(H) - 427kg 718mm(W) x 700mm(D) x 1187mm(H) - 275kg 2302mm(W) x 700mm(D) x 1169mm(H) - 472kg
DBMS-T Trimmer Front Knives	Max/Min Trim 2-25 mm Up to 75 mm with 12 pages or less	Connecting Devices		up to 4 DSC-10/60i Collating Towers
Max Trimming Thickness	6 mm			DSF-2200 Sheet Feeder DKT-200 Head and Foot Trimmer
DKT-200 Head and Foot Knives	Max/Min trim 2-60 mm 30 mm Max trim for each knife			DCR-ST Stacker (Criss Cross) 400STR Stacker (Straight & Offset Stacking)
DKT-200 Options	6 mm Gutter Cut knives 4mm Gutter Knife 9mm Gutter Knife Offset Trim with manual control (from 1 to 21 mm) 6.4 mm Diameter 2 Hole Punch Kicker/Batching Unit	Options		3 or 4 Hohner Flat/Loop heads 6 Page Cover Insert Kit (for DSC10/60i only) Sheet by Sheet Air Kit

DSC-10/60i Suction Tower Collator

Configurations	iSaddle and iSaddle Duetto	AMS+ Feeding System Total Feed Control on Each Bin	Ability to increase the flow of air and vacuum on each bin Ability to increase the Strength of air and vacuum on each bin Ability to adjust the feed timing Twin belt drive on conveyor Ability to adjust the sheet overlap Automatic ejection of faulty sets Stand-by or waiting mode
Bin Capacity	65 mm	Total reed Control of Lucit bill	
Paper Size	Max 356 mm (W) x 508 mm (L) Min 105 mm (W) x 148 mm (L)		
Paper Size Over 508 mm in Length	Max 230 mm (W) x 610 mm (L)		
Paper Weight	from MIN 52 gsm to MAX 300 gsm		
Max Booklet Processing Speed	5,000 A5 Booklets into iSaddle System Up to 10,000 A5 sets/hr into Jogger or Stacker	Power Supply	220 - 240V 50/60Hz 5.3A 980W
Detection	Miss, Double, Paper Jam and Empty Bin Sensors	Net Weight	303.5 Kg
Counters	Total, Batch, Set Reject	Dimensions	855 mm (D) x 830 mm (W) x 1972 mm (H)
Controls	PC Controlled Job programming, save and recall, automated set-up Microsoft Windows-based GUI (Graphical User Interface)	Connecting devices	iSaddle (up to 4x DSC10/60i Towers) DBM-500 & DBM-350 DSF-2200 Sheet Feeder (also in Duetto configuration) DCR-ST Stacker (Criss Cross)
Features	Block Mode Programmable Intelligent Bin Feeding A4 landscape Hand Marry Mode Hand Feeding Mode		400STR Stacker (Criss Cross) 400STR Stacker (Straight & Offset Stacking)
		Options	Ultrasonic Double Sheet Detection Barcode Reader Kit (not available at launch) Bi-directional Feeding

DSF-2200 Sheet Feeder

Configurations	iSaddle Digital or iSaddle Duetto	Optional Barcode Reader Kit	1D & 2D Barcode recognition on both trays Codes Supported: Code 39, 93, 128, 2of5, Datamatrix
Paper Capacity	Main feed tray: 200 mm media stack height Auxilary feed tray: 65 mm media stack height		
Paper Size	Max 356 mm (W) x 508 mm (L)	Options	Trail Edge Air Kit (Extra air for long sheet sizes up to 610 mm in Length) Pre-loading Tray kit (Pre-loading stack of sheets on trolley)
Paper Size Over 508 mm in Length (optional)	Max 230 mm (W) x 610 mm (L) Min 105 mm (W) x 200 mm (L)		
Paper Weight	from 60 gsm to 300 gsm	Power supply	220 - 240V 50/60Hz 1.1 A 260W
Controls PC Controlled Job programming, save and recall, atutomated set-up Microsoft Windows-Based GUI (Graphical User Interface)		Net Weights	115 Kg
	Dimensions	920 mm (W) x 750 mm (D) x 843.5 mm (H)	
Standard Features	OMR (Optical Mark Reader) end-of-set mark reader Ultrasonic Double Sheet Detection Hand Feeding Active Anti-Static bar		



Automated Precision House Hamm Moor Lane Addlestone Surrey KT15 2SD

Tel +44(0) 1932 263 900 Fax +44(0) 1932 263 901 info@duplointernational.com www.duplointernational.com Duplo is a trade mark of the of the Duplo Corporation. Duplo has a policy of continuous improvement and reserves the right to amend the above specification without prior notice Production rates are based on optimal operating conditions and may vary depending on stock and environmental conditions.



Ref: iSaddle/10/14