

Albyco



A RICOH Company

Albyco DST-serie Tape applicators

- Used for applying the double sided tape, sealing-tape and PVC-tape on the envelope, A4 paper, carton box, PVC material, decoration material and so on .
- It is widely used in building materials, packaging, printing and many other industries
- Instead of manual operation, and saving the labor force.
- It is light and flexible, convenient to move, PLC programming touch-screen, operation simple.
- With an adjustable feeding table and ability to load sheets up to 90 x 142 cm it is the perfect machine for small scale work.



www.Albyco.com



Albyco Double sided tape applicator machines

- Used for applying the double sided tape, sealing-tape and PVC-tape on the envelope, A4 paper, carton box, PVC material, decoration material and so on .
- It is widely used in building materials, packaging, printing and many other industries
- Instead of manual operation, and saving the labor force.
- It is light and flexible, convenient to move, PLC programming touch-screen, operation simple.
- With an adjustable feeding table and ability to load sheets up to 90 x 142 cm it is the perfect machine for small scale work.




Albyco DST-series: Double sided tape applicator machines

	Albyco DST-520	Albyco DST-1060	Albyco DST-1420
Max product width	90-520 mm, 20"	90-1.060 mm	90-1.420mm
Machine speed	25-30 m/min	30 m/min	30m/min
PLC Language	English, Spanish, Japanese	English, Spanish, Japanese	English, Spanish, Japanese
Electrical need	110-220V, 50HZ	110-220V, 50HZ	110-220V, 50HZ
Material	Envelope, A4 paper, carton box, PVC material	Envelope, A4 paper, carton box, PVC material	Envelope, A4 paper, carton box, PVC material
Max. material thickness	20 mm	20 mm	20 mm
Max number of spots in line	4	4	4
Min tape length	25 mm	25 mm	25 mm
Min. distance between application and the next	25 mm	25 mm	25 mm
Internal diameter roll tape	76 mm	76 mm	76 mm
Tape width	4 mm up to 33 mm	4 mm up to 33mm	4 mm up to 33 mm
Tape applicator/taping head	1, 2, 3 or 4	1, 2, 3 or 4	1, 2, 3 or 4
Minimum Product Thickness	76 gsm	76 gsm	76 gsm
Weight	125 kg	170 kg	205 kg
Dimensions	900x800x900mm (L x W x H)	1680x1300x1550mm (L x W x H)	1800x1900x1470mm (L x W x H)
Warranty	12 months	12 months	12 months

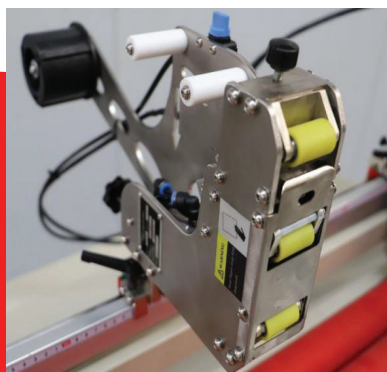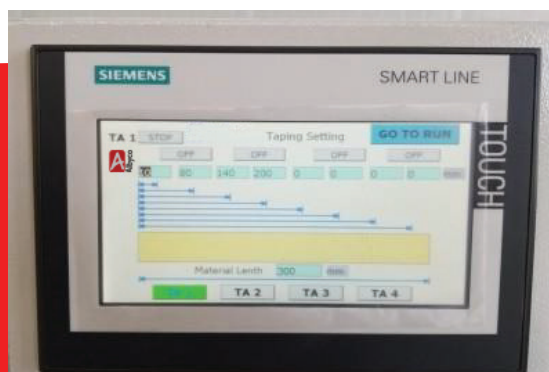

Examples:

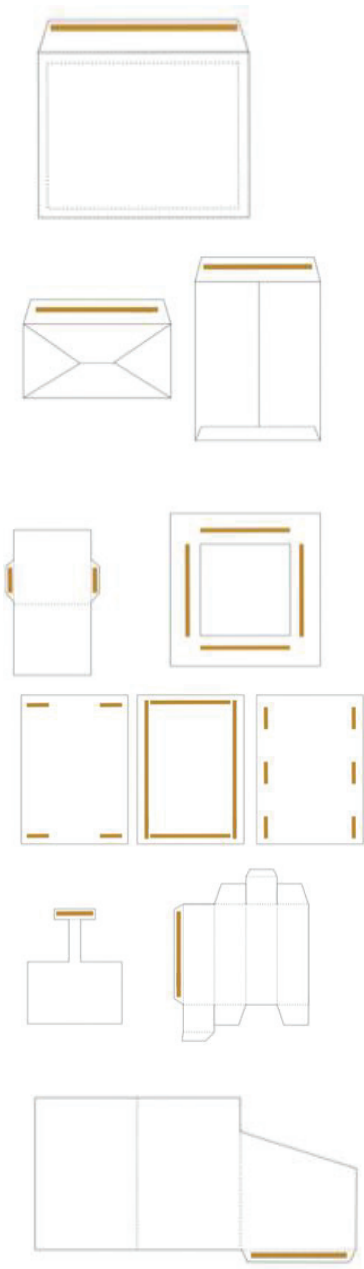

Albyco DMHA-30

Max outer diameter roll tape	450 mm
Tape width	4 mm to 33 mm
Magnet valve	24 volt DC
Compressor air	6 bar
Weight	6,5 kg



Configurations:



A RICOH Company

Name	Brand	Country
MAGNET VALVE	FESTO	GERMANY
AIR CYLINDER	FESTO	GERMANY
START AND STOP BUTTON	SCHNEIDER	FRANCE
EMS SWITCH	SCHNEIDER	FRANCE
AC CONTACTOR	SCHNEIDER	FRANCE
MOTOR	WANSHSIN	TAIWAN
SPEED CONTROL	WANSHSIN	TAIWAN
PLC TOUCH SCREEN	SIEMENS	GERMANY
PLC PROGRAM	SIEMENS	GERMANY
ENCODER	OMRON	JAPAN
SENSOR	KEYENCE	KOREA



Albyco Nederland bv
Takkebijsters 51-B
NL-4817 BL Breda
Nederland

www.albyco.com
sales@albyco.com
Tel. +31 (0)76 230 54 00